
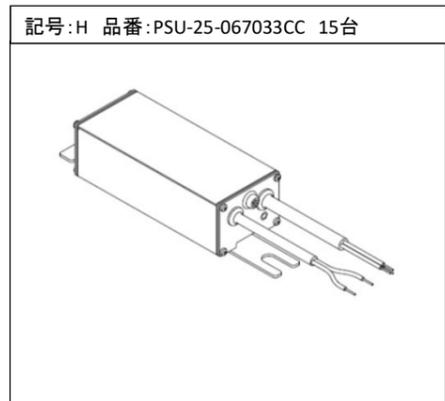
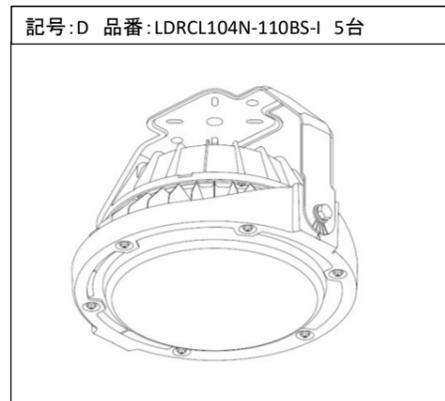
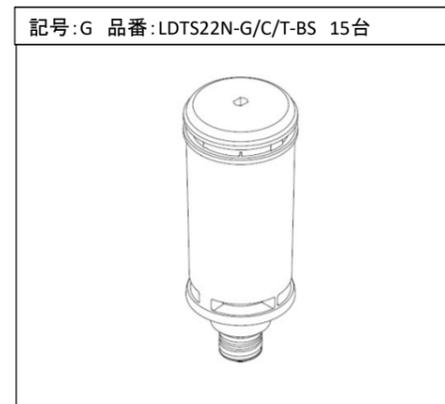
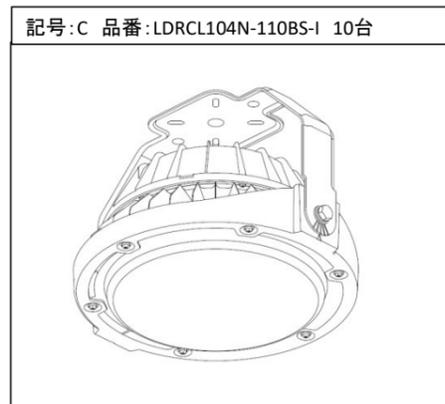
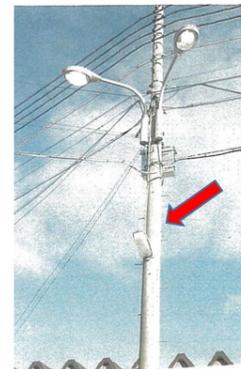
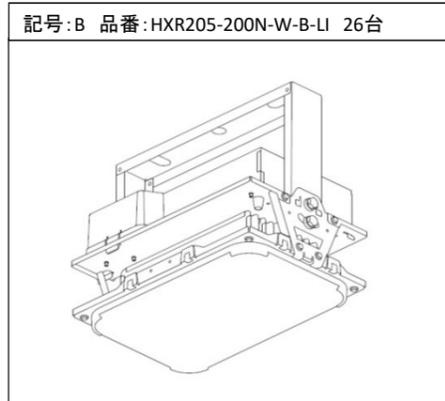
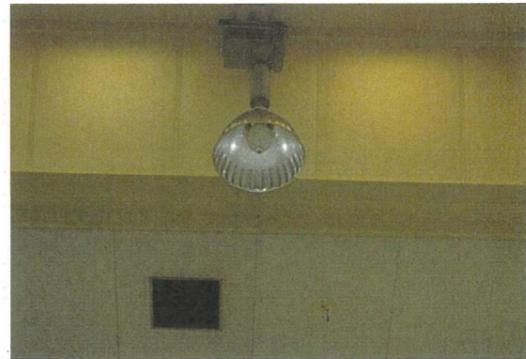
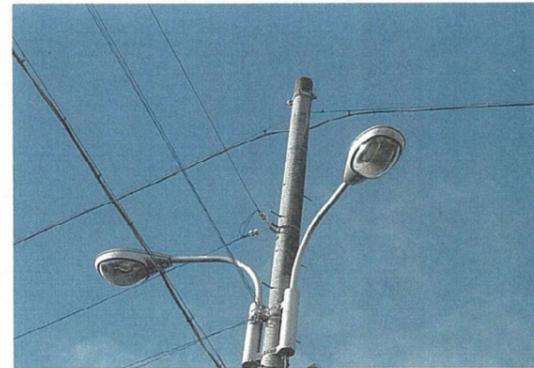



別紙LED仕様一覧

記号	設置場所	参考品番	数量	非調光器具					調光器具					備考	
				器具光束 (lm)	平均演色評価 数 (Ra)	定格消費電力 (W)	発光効率 (lm/W)	設計寿命(h)	器具光束 (lm)	平均演色評価 数 (Ra)	定格消費電力 (W)	発光効率 (lm/W)	設計寿命(h)		
1	A	多目的ホール(ダウンライト)	DL33N8-20W8W-DLS	9	-	-	-	-	-	3006	85	27.5	109.3	40,000	
2	B	多目的ホール(高天井照明)	HXR205-200N-W-B-LI	26	-	-	-	-	-	20000~21300	70~75	97.5-117	205.1~182	60,000	
3	C	テント席(高天井照明)	LDRCL104N-110BS-I	10	20000	75	105.8	189	60,000	-	-	-	-	-	
4	D	テント通路(高天井照明)	LDRCL104N-110BS-I	5	20000	75	105.8	189	60,000	-	-	-	-	-	
5	E	外灯(道路灯)	RD53C-L1KL-N-GR-V2	10	5000	75	37.9	131.9	60,000	-	-	-	-	-	
6	F	外灯(防犯灯)	IRLDBH40A-V3A	8	3900	85	30.8	126.6	60,000	-	-	-	-	-	
7	G	外灯(ポール灯)	LDTS22N-G/C/T-BS	15	4000	73	22.2	180.1	40,000	-	-	-	-	-	
8	H	外灯(電源ユニット)	PSU-25-067033CC	15	-	-	22.2	-	-	-	-	-	-	-	
9	I	外灯(投光器400W)	LDRSP78N-110BS-I	25	15000~17400	70-75	82.5~116	135.3~188.9	60,000	-	-	-	-	-	
10	J	外灯(投光器250W)	FLS-50W-W-K5-R7-W	4	8400	75	50.0	168	60,000	-	-	-	-	-	
11	K	外灯(投光器1000W)	FL3M-180W-25-K50-R7	4	27900	75	180.0	155	60,000	-	-	-	-	-	


現況写真及びLED商品(参考)仕様一覧

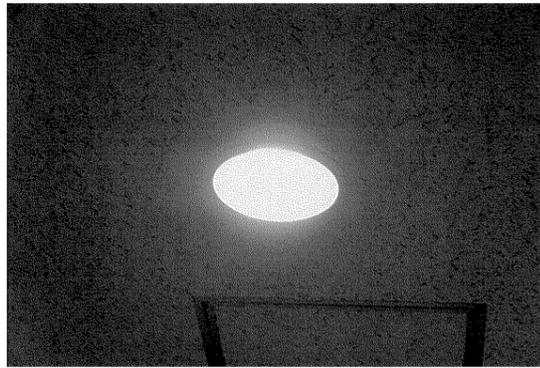


現況写真及びLED商品(参考)仕様一覧

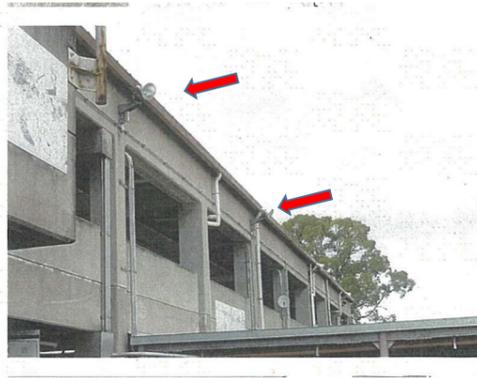

記号:I 品番:LDRSP78N-110BS-I 25台



記号:J 品番:FLS-50W-W-K5-R7-W 4台



記号:K 品番:FL3M-180W-25-K50-R7 4台

